


LED FLAT PANEL

Model No. PN24-50WS2000

Designed for superior illumination, ultimate efficiency... and easy installation, this 2x4 LED panel offers a larger driver for more space when wiring and a sturdy concave-convex backplate for no light leakage. This panel provides three wattage options, 20W/30W/40W on each unit, for a lumen output of either 3900lm/5200lm/6500lm, and offers three color temperature options: Soft White (3000K), Bright White (4000K), and Cool White (5000K).

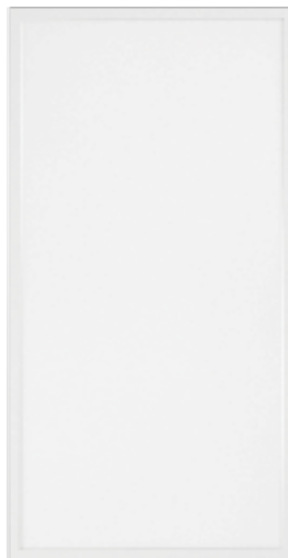

N/A

REPLACEMENT

3 Wattage Selectable

3CCT Selectable

Twin Pack

Flicker Free Driver

Dimmable

Damp Rated

Easy and Fast Installation

Electrical Specifications

Input Power	Input Voltage	Lumen Output	Luminous Efficacy	CCT	Input Current	Estimated Yearly Cost
30 W	AC100-277V	3900 lm	130 lm/W	3000K	0.28 A	\$ 3.61
40 W	AC100-277V	5200 lm	130 lm/W	4000K	0.38 A	\$ 4.81
50 W	AC100-277V	6500 lm	130 lm/W	5000K	0.47 A	\$ 6.02

Beam Angle	Center Beam	CRI	Power Factor	Base	Warranty Yrs.	Lamp Lifespan
110°	N/A	80	0.9	N/A	5 years	50,000 Hrs.

Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Damp Rated	-13°F - 113°F	2 pcs	N/A	23.7"(W) x 47.7"(L) x 1.57"(H)	811174035121

Product Dimensions

